AC1902

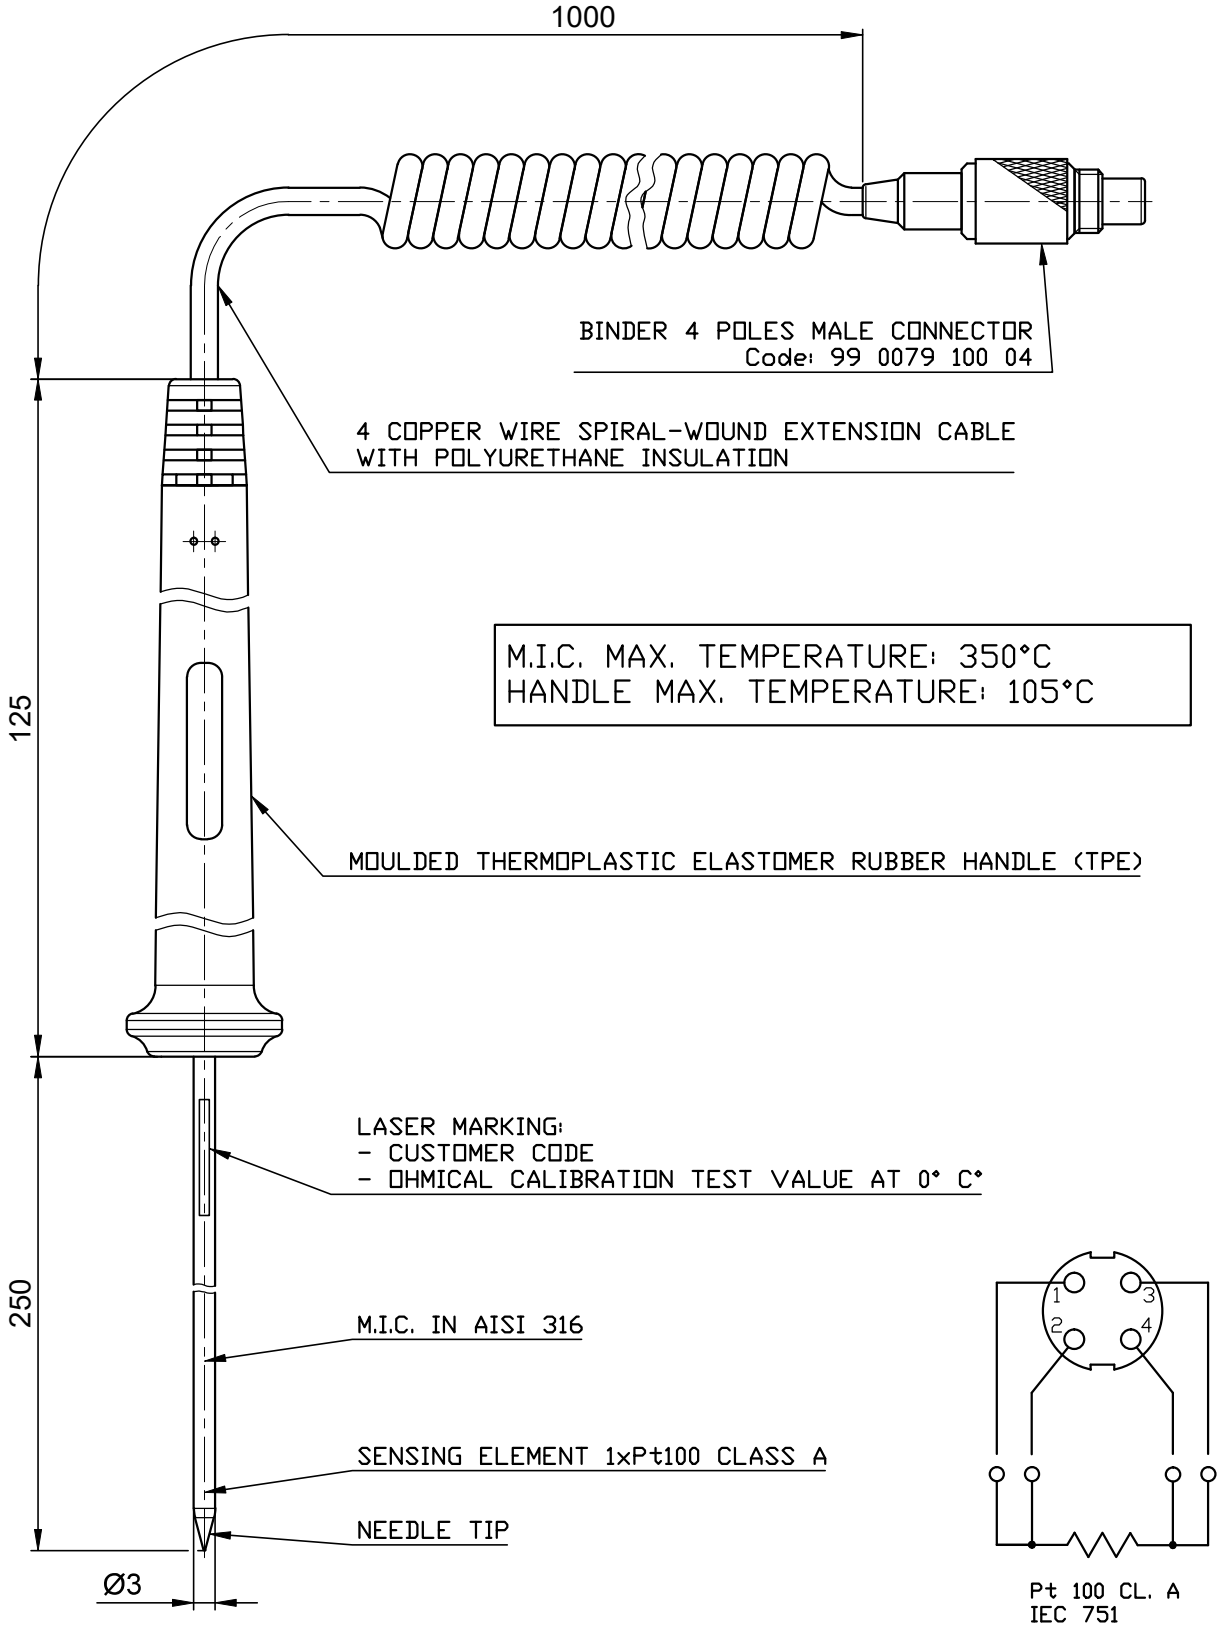
1000
BINDER 4 POLES MALE CONNECTOR
Code: 99 0079 100 04
4 COPPER WIRE SPIRAL-WOUND EXTENSION CABLE
WITH POLYURETHANE INSULATION
M.I.C. MAX. TEMPERATURE: 350°C
HANDLE MAX. TEMPERATURE: 105°C
125
MOULDED THERMOPLASTIC ELASTOMER RUBBER HANDLE (TPE)
LASER MARKING:
- CUSTOMER CODE
- OHMICAL CALIBRATION TEST VALUE AT 0° C°
250
M.I.C. IN AISI 316
SENSING ELEMENT 1xPt100 CLASS A
NEEDLE TIP
Ø3
1
2
3
4
Pt 100 CL. A
IEC 751